

The solution for unable to update program of M70 under WINDOW VIXTA / WINDOW 7 system.

If computer had installed driver of M70, please operating according to the following steps to unload.

The first step: Connect M70 and computer

The second step: Power on M70

The third step: Right click **COMPUTER** with the mouse, and choose **Device Manager**



The fourth step: Right click VOXOA M70 2.9.41 with the mouse, and un
oad



The fifth step: Choose "delete driver" and confirm




The sixth step: When delete successfully, interface will show as below



The seventh step: Power off M70, please operating according to the following steps to update M70.

Connect M70 and computer----Before power on M70, please press and hold CHANNEL 1 "MONITOR CUE" , CHANNEL 2" MONITOR CUE" and "DRY/WET ENCODER" buttons simultaneously----Power on M70. You can see Level indicator lights flashing back and forth, which means M70 is under updating mode.

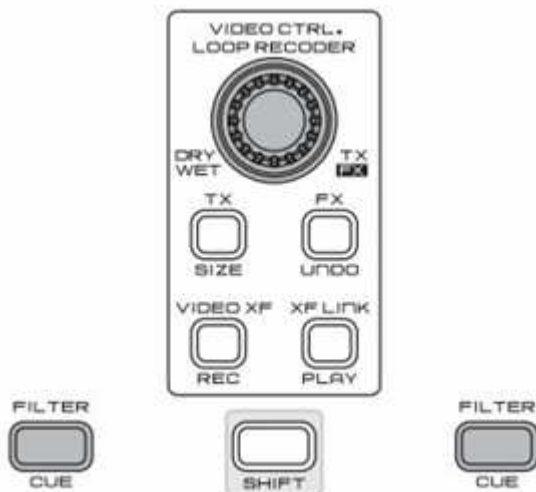

The eighth step: Under updating state, device manager will read M70. As is shown below:



The ninth step: Waiting for ten seconds, then the computer will automatically find suitable driver and show M70




The tenth step: Open updated software of M70 (voxaa-update_v1.11.jar). Please noted that computer should be installed "jre-6u27-window-i586-s.exe" in advance.

名称	修改日期	类型
VOXOA_M70_ASIO_Driver	2013/5/14 10:43	文件夹
M70_EQ.bin	2013/5/14 10:13	BIN 文件
M70_MIDI.bin	2013/5/14 10:13	BIN 文件
VOXOA_Update_v1.11.jar	2012/4/23 9:11	Executable Jar
psetupsafe.zip	2013/4/30 12:06	WinRAR ZIP 文件
VOXOA Firmware Update.rar	2013/5/14 10:19	WinRAR 压缩
VOXOA_M70_ASIO_Driver.rar	2013/5/14 10:43	WinRAR 压缩
jre-6u27-windows-i586-s.exe	2013/5/14 10:22	应用程序



The eleventh step: You need to click “open file” to find your wanted update software of M70, then “open”

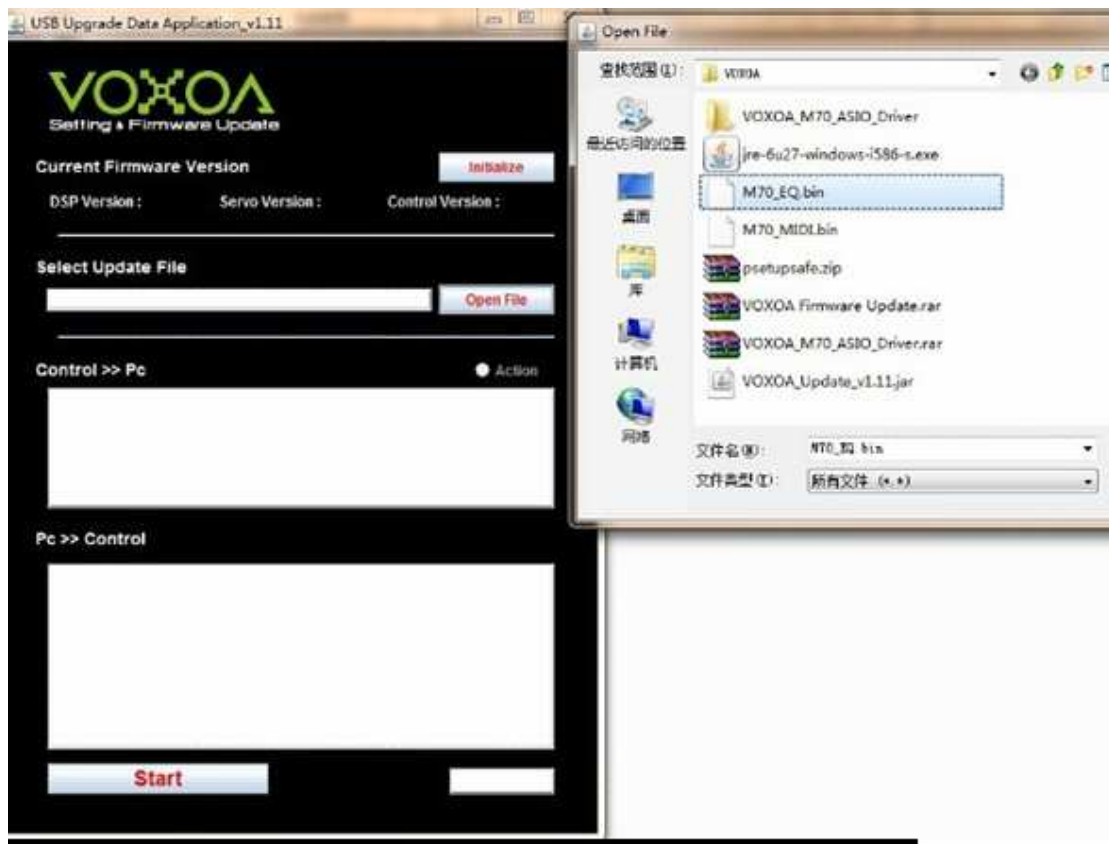

The twelfth step: Click "START", M70 begins to update and show as below when finished. Then help to confirm.

