

VOXOA M70 Update Steps under MAC OS

STEP 1: Download and install the JAVA program

Enter into the JAVA official website to download JAVA program and install.

http://www.java.com/zh_CN/download/manual.jsp



The screenshot shows the Java download page for Mac OS X. On the left, there is a navigation menu with 'Java 8' selected, and links for '» java.com 上为什么不提供 Java 8?' and '» JDK'. The main content area is titled 'Mac OS X' and includes a link 'Mac 下载常见问题'. Below this, there are two download options for Mac OS X (version 10.7.3 and higher):

Download Option	File Size	Notes
Windows 联机	897 KB	在安装 Java 后, 重新启动浏览器并确保 Java 已正确安装。
Windows 脱机	28.0 MB	同上
Mac OS X (版本 10.7.3 和更高版本)	48.5 MB	在安装 Java 后, 可能需要重新加载或退出浏览器, 以便在浏览器中启用 Java。

There is also a note for Linux: 'Linux RPM 文件大小: 31.5 MB'. A footnote at the bottom states: '* Java 7 需要基于 Intel 的 Mac, 该操作系统运行的是 Mac OS X 10.7.3 (Lion) 或更高版本, 并且需要管理员权限才能安装。 » 详细信息'


STEP 2: Download MMJ Driver from below address:


<http://www.humatic.de/htools/mmj.htm>

Please help to decompress **mmj.jar** and **libmmj.jnilib**, and then copy them, Also you

need paste JAVA FOLDER of MAC into below address

<:/system/Library/Java/Extensions>

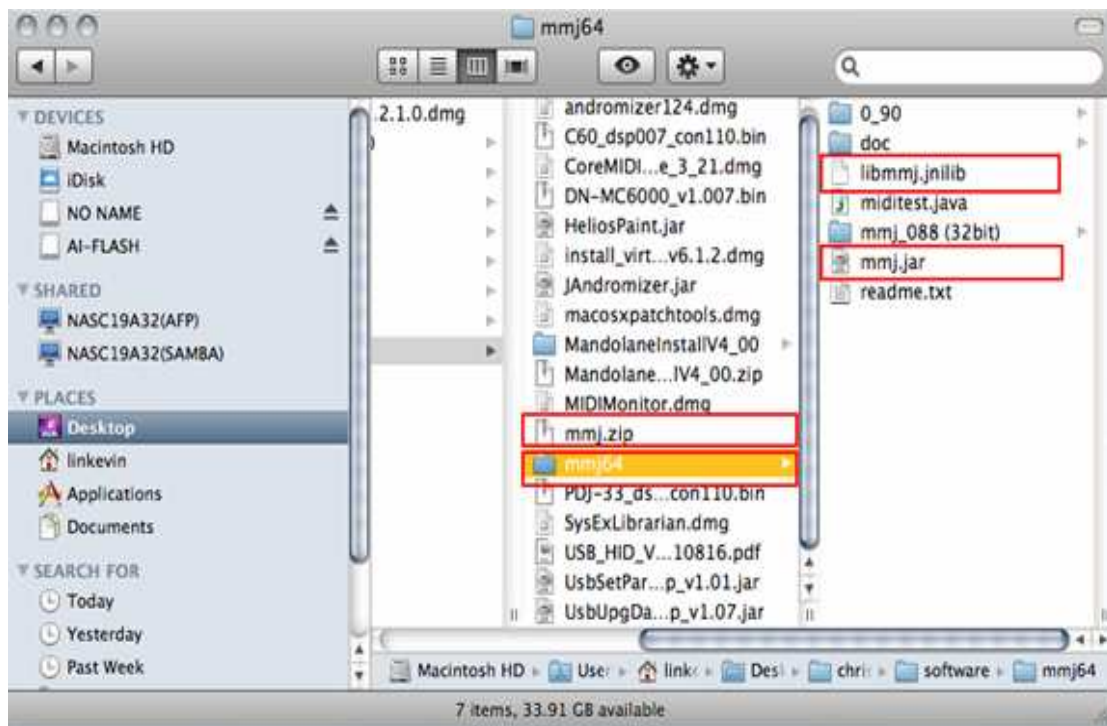


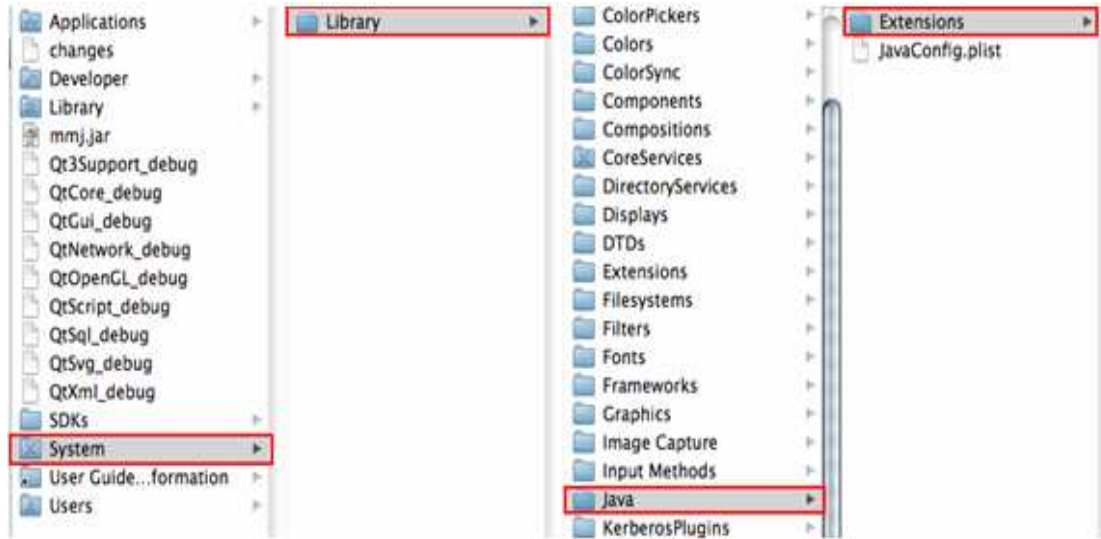

STEP 3:.

A: Power off M70, please operating according to the following steps to update M70.

Connect M70 and computer-----Before power on M70, please press and hold CHANNEL 1 "MONITOR CUE", CHANNEL 2" MONITOR CUE" and "DRY/WET ENCODER" buttons simultaneously-----Power on M70. You can see Level indicator lights flashing back and forth, which means M70 is under updating mode.

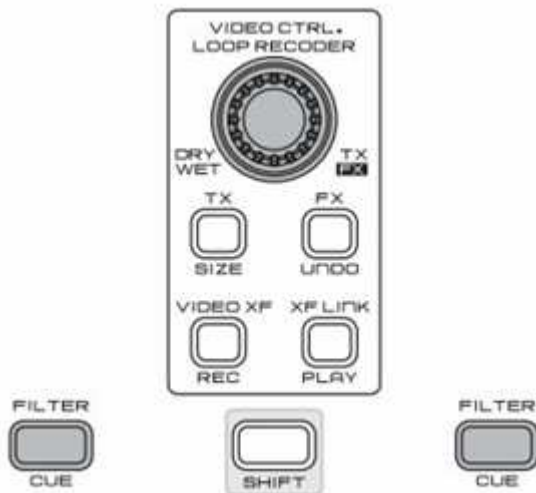

B: To open SETTING UPDATE file [VOXOA_Update_v1.11.jar](#) , CLICK *OPEN File* to choose needed update firmware, and then click *START*. The latest version of firmware is 1.10 version. When pop up Update Success, it means you had updated firmware successfully.



Current Firmware Version

Initialize

DSP Version :

Servo Version :

Control Version :

Select Update File

Open File

Control >> Pc

Action

Pc >> Control

Start

Select Update File

E:\VOXOA.DISKM70M70_v1.10.bin

Open File

Control >> Pc

Action

Control >> Pc Action

Request Address:0x0

Pc >> Control

Reply Address:0x0

Send Update Data to Control.....

Send Check Sum Value to Control.....

Wait.....

